




DV MOD 255 (951 001)


- High discharge capacity due to powerful creepage discharge spark gap
- Easy replacement of protection modules without tools due to module locking system with module release button
- The plug-in protection module can be replaced without the need to de-energise and without removing the distribution board cover



Figure without obligation



Basic circuit diagram DV MOD 255

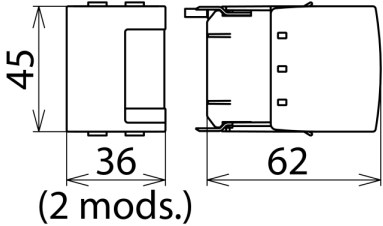

Dimension drawing DV MOD 255

Spark-gap-based protection module

Type	DV MOD 255
Part No.	951 001
Max. continuous operating voltage (a.c.) (U _c)	264 V
Lightning impulse current (10/350 μs) (I _{imp})	25 kA
Specific energy (W/R)	156.25 kJ/ohms
Follow current extinguishing capability [L-N] (a.c.) (I _{fn})	50 kA _{rms}
Follow current limitation / Selectivity	no tripping of a 20 A gG fuse up to 50 kA _{rms} (prosp.)
Weight	192 g
Customs tariff number	85363030
GTIN	4013364108066
PU	1 pc(s)

We reserve the right to introduce changes in performance, configuration and technology, dimensions, weights and materials in the course of technical progress. The figures are shown without obligation.