


⚠ Important Safety Notice

It is the responsibility of the person installing the electrical equipment to ensure that the installation meets the requirements of the IET wiring regulations and is therefore 'fit for purpose'. Factors such as correct selection of components, cable sizing, protective devices and Earth bonding are all critical and should be checked prior to full testing and power-up. Any other regulations applicable to the equipment being installed such as the Machinery Directive and current health and safety legislation must also be adhered to. All connections (including factory made) must be checked for the correct tightness prior to commissioning of the electrical installation. All connections should be checked periodically to ensure correct tightness.

DO NOT USE POWER TOOLS ON THESE PRODUCTS



CE

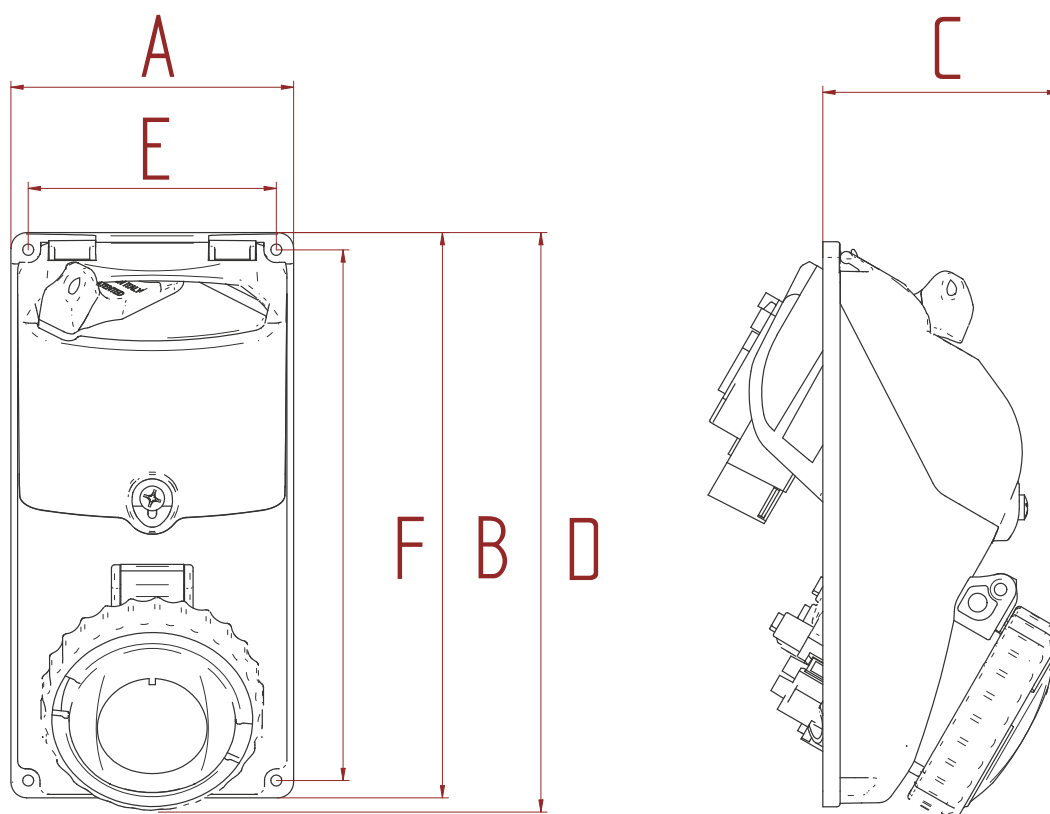

16A Dimensions

Part Number	No. of Poles	Current	Earth Pos.	Voltage	A	B	C	D	E	F
73246	2P+E	16A	4h	110V	90	180	75	184	79	169
73240-3531A			6h	230V						
73244-3531A	3P+E									
73245-3531A	3P+N+E									

32A Dimensions

Part Number	No. of Poles	Current	Earth Pos.	Voltage	A	B	C	D	E	F
73266	2P+E	32A	4h	110V	90	180	91	190	79	169
73260-3531A			6h	230V						
73264-3531A	3P+E									
73265-3531A	3P+N+E									