

This document must be retained for future reference.

It is the responsibility of the person installing the electrical equipment to ensure that the installation meets the requirements of the IET wiring regulations and is therefore 'fit for purpose'. Factors such as correct selection of components, cable sizing, protective devices and Earth bonding are all critical and should be checked prior to full testing and power-up. Any other regulations applicable to the equipment being installed such as the Machinery Directive and current health and safety legislation must also be adhered to.

All connections (including factory made) must be checked for the correct tightness prior to commissioning of the electrical installation.
All connections should also be inspected periodically to ensure correct tightness.


DO NOT USE POWER TOOLS ON THESE PRODUCTS



TPNSPD2MCBKIT

TPN SPD Kits for TPNXX Range- Type 2


1) Remove the Neutral Cover by pulling it out.
Remove blank modules installed on the DIN rail.

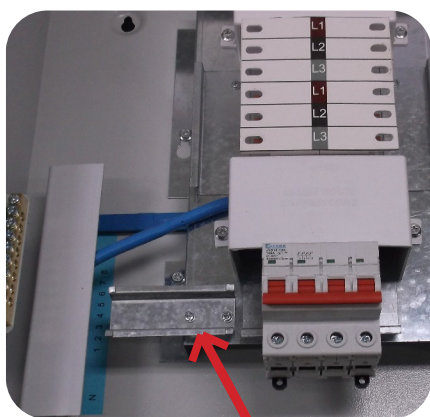

3) Insert the 63A MCB to the bottom-left-most three-phase way on the board with the OFF position pointing towards the centre of the board. Ensure that the terminals are tightened to the correct torque (See reverse).



2) Ensure that the SPD cartridges are in the correct orientation (PE on top). If not, remove SPD cartridges from holder and replace. Ensure that the correct SPD module (Earth) is installed at the correct part of the holder.

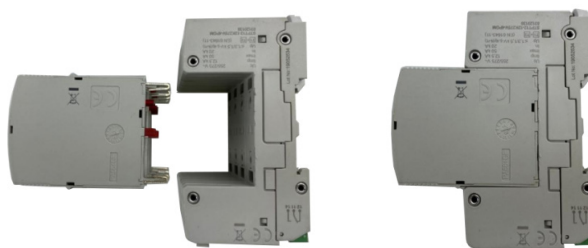

4) Attach the SPD on to the din rail located on the left of the 4 Pole 125A Main Switch Incomer. Ensure that the PE is located at the top.



- 5) Connect the 3 Pole MCB and the SPD.
Brown wire: L1 MCB > L1 SPD
Black wire: L2 MCB > L2 SPD
Grey wire: L3 MCB > L3 SPD



- 6) Connect the SPD to the Neutral Terminal.
Blue wire: N (SPD) to Neutral Terminal.



- 7) Connect the SPD to the Earth Terminal.
Earth wire: PE (SPD) to Earth Terminal



- 8) Replace the Neutral Cover.



- 9) Attach the TPN front cover ensuring that the SPD goes through the window cut-out provided on the lid.
Apply the labels to specify the MCB and SPD.

Torque Settings

Component	Torque Settings
MCB	2Nm
SPD	4Nm
Earth / Neutral Terminals	2Nm