

This document must be retained for future reference.



It is the responsibility of the person installing the electrical equipment to ensure that the installation meets the requirements of the IET wiring regulations and is therefore 'fit for purpose'. Factors such as correct selection of components, cable sizing, protective devices and Earth bonding are all critical and should be checked prior to full testing and power-up. Any other regulations applicable to the equipment being installed such as the Machinery Directive and current health and safety legislation must also be adhered to.

All connections (including factory made) must be checked for the correct tightness prior to commissioning of the electrical installation.
All connections should also be inspected periodically to ensure correct tightness.

DO NOT USE POWER TOOLS ON THESE PRODUCTS



EBT16-8
Bell Transformer

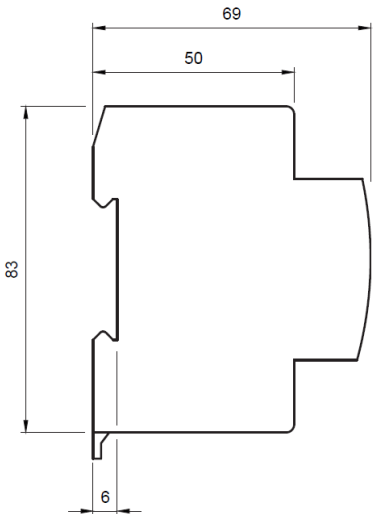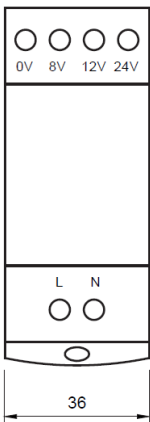

Product	EBT16-8 Bell Transformer
Standard(s)	EN61558-2-8
Rated Output Current	8V= 1A, 12V = 0.67A, 24V = 0.33A
Rated Input Voltage	AC 230(240)
Rated Frequency	50Hz
Transformer Power Rating	8VA
Power Consumption	0.9W
Operating Temperature	-5° to 40°C (average not exceeding 35°C over a 24 hour period)
Altitude	Not exceeding 2000 metres
Humidity	Not exceeding 50% at 40°C and 90% at 20°C
Pollution Degree	2
External Magnetic Field	Not exceeding 5 times the earth's magnetic field in any direction
Terminal protection	IP20
Mounting	35mm DIN Rail
Terminal Type	Tunnel
Terminal Capacity	1.0-4mm ²
Recommended Terminal Torque	0.8Nm