

BOLTIN 660/690V a.c. Fuse-Holders for Fuse-Links to BS88: Part 2 & IEC 60269-2


TYPE LBI



For white fuse-holders substitute WH for BK in list references.
Green fuse-holders are available, details on request.

The BOLTIN fuse-holders are available in three versions, front connected, back connected, and front/back connected, in ratings of 20, 32, 63, 100, and 200 Amps. The range fully complies with BS88: Part 2 and is ASTA Certified to a test duty of 80kA at 660V and complies with the current edition of the IEE Wiring Regulations.

List Reference	Current Rating (A)	Colour	Lawson Fuse-Link 415V 660V	Solid Link
LBI 20 FC/FC BK LBI 20 FC/BC BK LBI 20 BC/BC BK	20	Black	NIT SSA1	SLA1 20
LBI 32 FC/FC BK LBI 32 FC/BC BK LBI 32 BC/BC BK	32		GTIA/TIA SSA2	SLA2 32
LBI 63 FC/FC BK LBI 63 FC/BC BK LBI 63 BC/BC BK	63		TIS SSA3	SLA3 63
LBI 100 FC/FC BK LBI 100 FC/BC BK LBI 100 BC/BC BK	100		TCP SSA4	SLA4 100
LBI 200 FC/FC BK LBI 200 FC/BC BK LBI 200 BC/BC BK	200		CTF/TF SSB2	SLB2 200
Spare Carriers	Spare Cable Shrouds (Grey)	DIN-Rail Adaptor		
LBI 20 CA BK LBI 32 CA BK LBI 63 CA BK LBI 100 CA BK LBI 200 CA BK	LBI 20 SH LBI 32 SH LBI 63 SH LBI 100 SH LBI 200 SH	LBI 20 DA		
		Busbar Stud Connector		
		LBI 32 LBI 63		

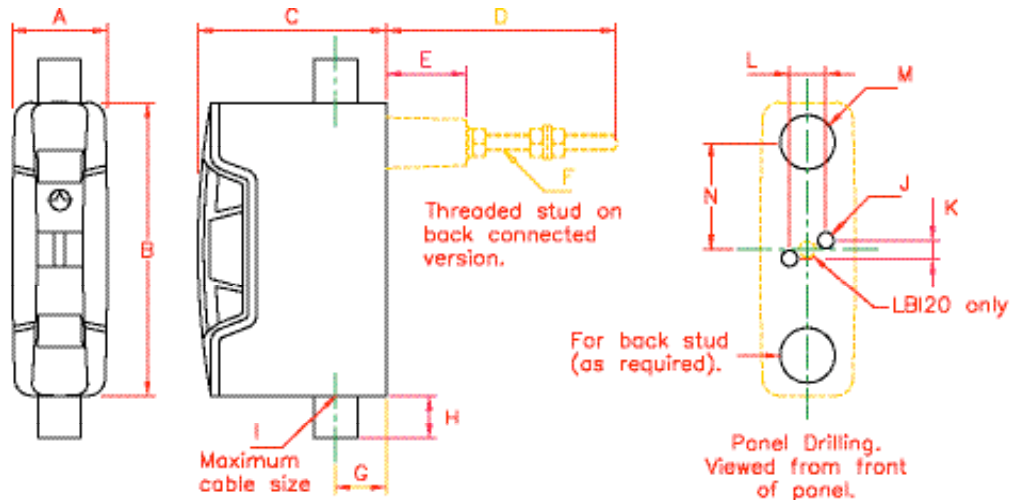

LAWSON REFERENCE	CURRENT RATING AMPS	GENERAL DIMENSIONS (mm)													
		A	B	C	D	E	F	G	H	I mm ²	J	K	L	M	N
LBI20	20	27	80	48	60	28.5	M6	16	14	10	5.5	n/a	n/a	15	29
LBI32	32	33	102	65	78	28.5	M6	16	14	16	5.5	6.3	12.7	19	37
LBI63	63	36	112	72	84	28.5	M8	19	14	25	5.5	6.3	12.7	19	39
LBI100	100	53	144	90	85	32	M10	24	14	70	6.5	22	19	23	48
LBI200	200	60	171	143	95	32	M12	30	21	120	6.5	57	38	28	61