


⚠ Important Safety Notice ⚠

It is the responsibility of the person installing the electrical equipment to ensure that the installation meets the requirements of the IET wiring regulations and is therefore 'fit for purpose'. Factors such as correct selection of components, cable sizing, protective devices and Earth bonding are all critical and should be checked prior to full testing and power-up. Any other regulations applicable to the equipment being installed such as the Machinery Directive and current health and safety legislation must also be adhered to. All connections (including factory made) must be checked for the correct tightness prior to commissioning of the electrical installation. All connections should be checked periodically to ensure correct tightness.

DO NOT USE POWER TOOLS ON THESE PRODUCTS


- Material: Polyamide 6
- Flammability: UL94-VO
- IP Rating: Neutral Link Plus Shroud IP2X
- Glow Wire: 650°C

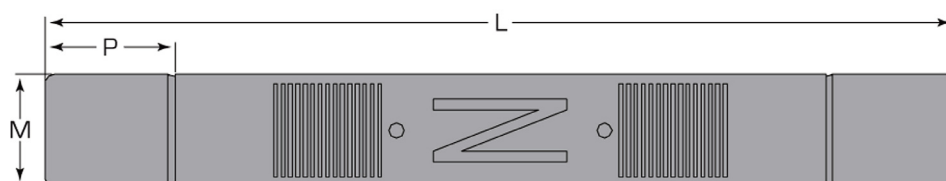

Shroud Plan View



Shroud Side View

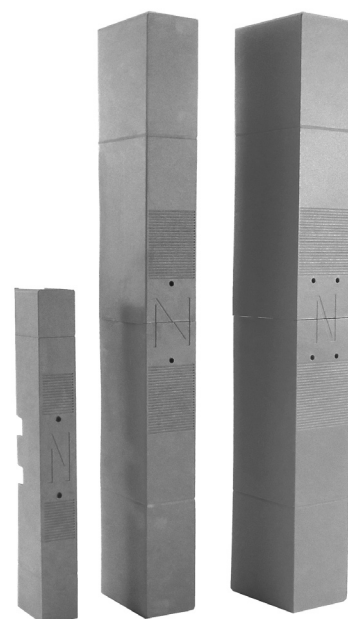

Product	Product Description	L	M	N	P	Fits Product Codes
LBNLTS250A	125A - 250A	245	30	45	35	LBNL125A & LBNL250A
LBNLTS630A	400A - 630A	440	45	70	85	LBNL400A & LBNL630A
LBNLTS800A	800A - 1000A	440	60	70	80	LBNL800A & LBNL1000A