


⚠ Important Safety Notice ⚠


It is the responsibility of the person installing the electrical equipment to ensure that the installation meets the requirements of the IET wiring regulations and is therefore 'fit for purpose'. Factors such as correct selection of components, cable sizing, protective devices and Earth bonding are all critical and should be checked prior to full testing and power-up. Any other regulations applicable to the equipment being installed such as the Machinery Directive and current health and safety legislation must also be adhered to. Terminals, including factory fitted, should be checked periodically to ensure correct tightness.

DO NOT USE POWER TOOLS ON THESE PRODUCTS


Product Prefix	Blue & White Handle	Red & Yellow Handle	Shaft Section (mm)	L (mm)	P (mm)	S (mm)	D (mm)	
Standard Handle and Shafts								
LBC160/LBCD160	LBPHBW060	Not Available	□7	177	163-250	94	60	
LBC200/LBCD200								
LBC250/LBCD250								
LBC315/LBCD315	LBPHBW070		□10	227	166-293	143	69	
LBC400/LBCD400								
LBC630/LBCD630	LBPHBW080		□14	195	195-272	176		
LBC800/LBCD800								
LBC1000/LBCD1000	LBPHBW110			186	223-298	396		
Extended Shafts								
Product Prefix	Extended Shaft Type 1	Shaft Section (mm)	L (mm)	P (mm)	Extended Shaft Type 2	L (mm)	P (mm)	
LBCD160	LBES010	□7	250	163-323	LBES020	387	163-460	
LBCD200								
LBCD250								
LBCD315	LBES030	□10	376	166-442	LBES040	536	166-602	
LBCD400								
LBCD630	LBES050	□14	345	195-422	LBES060	535	195-612	
LBCD800				223-457			223-647	
LBCD1000								




P=DISTANCE FROM THE BACK OF THE SWITCH TO THE INSIDE OF THE PANEL



L=SHAFT LENGTH

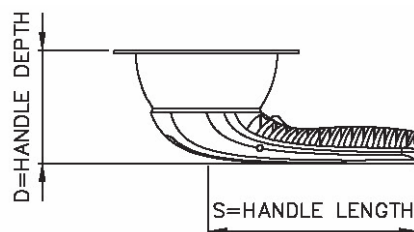

D=HANDLE DEPTH
S=HANDLE LENGTH

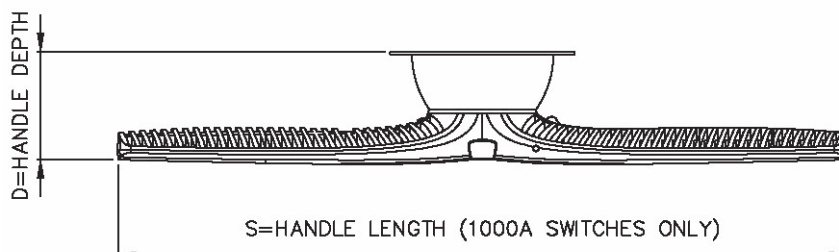

S=HANDLE LENGTH (1000A SWITCHES ONLY)