

⚠ Important Safety Notice ⚠

It is the responsibility of the person installing the electrical equipment to ensure that the installation meets the requirements of the IET wiring regulations and is therefore 'fit for purpose'. Factors such as correct selection of components, cable sizing, protective devices and Earth bonding are all critical and should be checked prior to full testing and power-up. Any other regulations applicable to the equipment being installed such as the Machinery Directive and current health and safety legislation must also be adhered to.


Terminals, including factory fitted, should be checked periodically to ensure correct tightness.

DO NOT USE POWER TOOLS ON THESE PRODUCTS

Metric Blanking Plugs

- CE Approved
- IP68 Rating (with washer sold separately)
- Temperature Range: -20°C to +80°C, intermittent 100°C
- Material: Nylon / Halogen Free
- Colours: **RAL 7035** (light grey) **RAL 9005** (jet black)

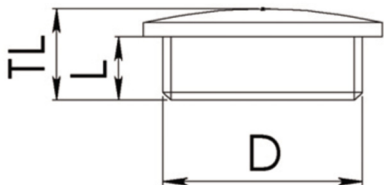


① Plug Dimensions mm	Type	D	L	TL
	M12	M12 x 1.5	6	8
	M16	M16 x 1.5	6	9
	M20	M20 x 1.5	6	9.5
	M25	M25 x 1.5	8	11.5
	M32	M32 x 1.5	8	12
	M40	M40 x 1.5	8	13

PG to Metric Adaptors (PG Male to Metric Female)

- IP68 Rating (with washer sold separately)
- Temperature range -20°C to +80°C, intermittent +100°C
- Material: Nylon / Halogen Free
- Colour: **RAL 7035** (light grey)
- Locking nut not included

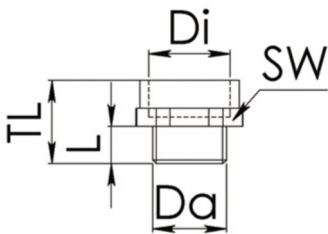

① Adaptor Dimensions mm	Type	Da	Di	L	SW	TL
	7-12	PG7	M12 x 1.5	9	16	27
	9-16	PG9	M16 x 1.5	9	20	27
	11-20	PG11	M20 x 1.5	9	24	27
	13.5-20	PG13	M20 x 1.5	10	24	28
	16-25	PG16	M25 x 1.5	10	29	28
	21-25	PG21	M25 x 1.5	12	33	30
	29-40	PG29	M40 x 1.5	12	46	30