

Europa Components, Europa House, Airport Way, Luton, Beds, LU2 9NH
 Technical: 01582 692 444 | technical@europacomponents.com
 Sales: 01582 692 440 | sales@europacomponents.com
 Website: www.europacomponents.com



It is the responsibility of the person installing the electrical equipment to ensure that the installation meets the requirements of the IET wiring regulations and is therefore 'fit for purpose'. Factors such as correct selection of components, cable sizing, protective devices and Earth bonding are all critical and should be checked prior to full testing and power-up. Any other regulations applicable to the equipment being installed such as the Machinery Directive and current health and safety legislation must also be adhered to.

All connections (including factory made) must be checked for the correct tightness prior to commissioning of the electrical installation.
 All connections should be inspected periodically to ensure correct tightness.



DO NOT USE POWER TOOLS ON THESE PRODUCTS

Part Number: **SPSF100M / SPSF100M-F**

100A SINGLE PHASE SWITCH FUSE IN 5 MODULE METAL CLAD ENCLOSURE


Features & Benefits

- IP54 Enclosure
- Comes with 100A Main Switch, 22 x 58 Fuse Holder
- Copper link provided in a bag (see Wiring Instructions overleaf)
- Earth and Neutral terminals provided
- Amendment 3 Compliant
- Epoxy powder coated RAL 7035
- Generous wiring space
- Top and bottom knockouts
- Cable entry 2 x 20mm and 1 x 25mm top and bottom
- Twist lock screw lid with rubber gasket
- SPSF100M-F supplied with 63A, 80A and 100A fuses



	Main Switch (Double Pole)	22 x 58 Fuse Holder
Standards	IEC/EN60947-3	EN60269-1/HD60269-2
Certification/ Approvals	SEMKO, CE	TUV, CE
Current Rating @ 230V 50Hz	100A	100A Max
Width	2 Module (36mm)	
Utilisation Category	AC-22B	N/A
Terminal Protection	IP20	
Terminal Capacity	35mm ²	
Recommended Terminal Torque	2.5 Nm	

Installation Instructions

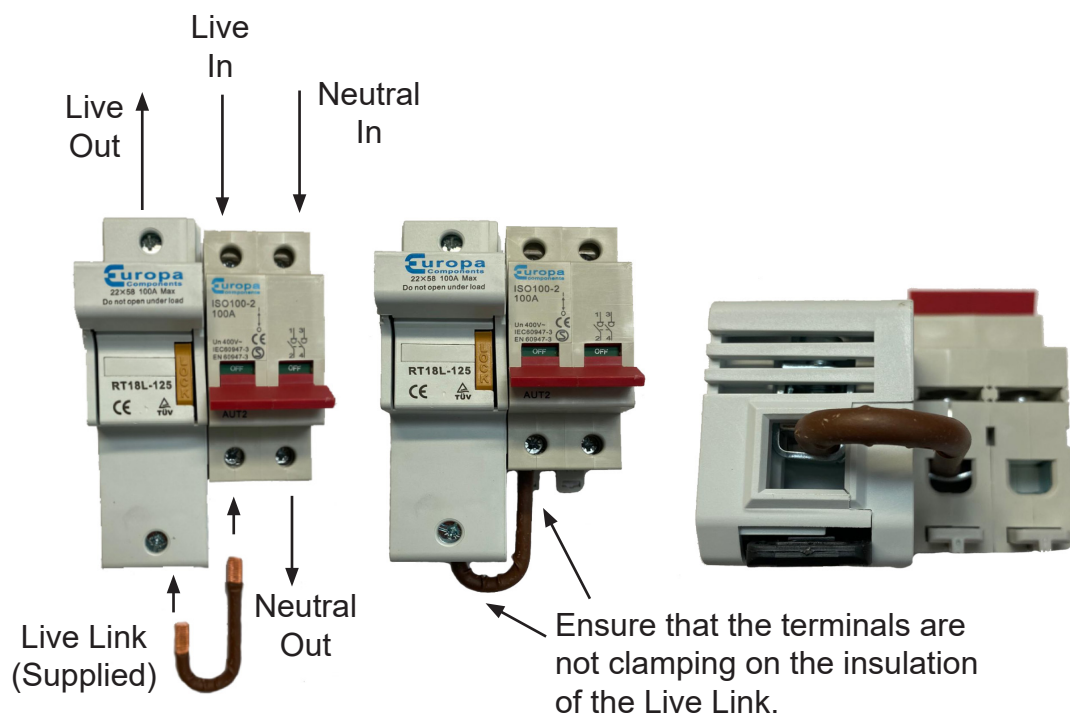

Ensure that the copper link is clamped correctly into the fuse holder and main switch as shown with the recommended torque setting (2.5Nm).

WARNING! DO NOT OPERATE FUSE HOLDER UNDER LOAD!

Dimensions

