

This document must be retained for future reference.

It is the responsibility of the person installing the electrical equipment to ensure that the installation meets the requirements of the IET wiring regulations and is therefore 'fit for purpose'. Factors such as correct selection of components, cable sizing, protective devices and Earth bonding are all critical and should be checked prior to full testing and power-up. Any other regulations applicable to the equipment being installed such as the Machinery Directive and current health and safety legislation must also be adhered to.

All connections (including factory made) must be checked for the correct tightness prior to commissioning of the electrical installation.  
All connections should also be inspected periodically to ensure correct tightness.


DO NOT USE POWER TOOLS ON THESE PRODUCTS



## Insulated PG Cable Glands

### Features & Benefits

- IP65 (IP68 when rubber fitted with washer- sold separately)
- Manufactured from nylon (Halogen Free)
- Lock Nut Included
- Pack quantity: 10pcs
- Available in White, Black or grey

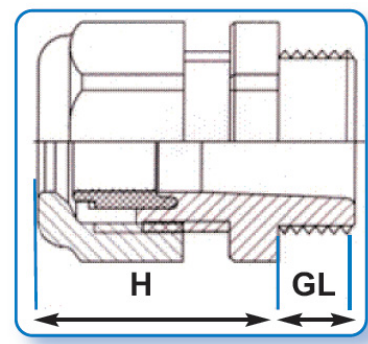

Part Number	PG Cable Gland Description	Cable Size (mm)	GL (mm)	H (mm)
PG7DG	PG7 Nylon Cable Gland Grey	3 - 6.5	8	22
PG9DB	PG9 Nylon Cable Gland Black	4 - 8	8	26
PG9DG	PG9 Nylon Cable Gland Grey	4 - 8	8	26
PG9DW	PG9 Nylon Cable Gland White	4 - 8	8	26
PG11DG	PG11 Nylon Cable Gland Grey	5 - 10	8	27
PG13.5DB	PG13.5 Nylon Cable Gland Black	6 - 12	9	28
PG13.5DG	PG13.5 Nylon Cable Gland Grey	6 - 12	9	28
PG13.5DW	PG13.5 Nylon Cable Gland White	6 - 12	9	28
PG16DB	PG16 Nylon Cable Gland Black	10 - 14	10	30
PG16DG	PG16 Nylon Cable Gland Grey	10 - 14	10	30
PG16DW	PG16 Nylon Cable Gland White	10 - 14	10	30
PG21DB	PG21 Nylon Cable Gland Black	13 - 18	10	35
PG21DG	PG21 Nylon Cable Gland Grey	13 - 18	10	35
PG21DW	PG21 Nylon Cable Gland White	13 - 18	10	35
PG29DG	PG29 Nylon Cable Gland Grey	18 - 25	12	40
PG29DW	PG29 Nylon Cable Gland White	18-25	12	40