EUROPA

Data Sheet
EDS1347-004

This document must be retained for future reference.

It is the responsibility of the person installing the electrical equipment to ensure that the installation meets the requirements of the IET wiring regulations and is therefore 'fit for purpose'. Factors such as correct selection of components, cable sizing, protective devices and Earth bonding are all critical and should be checked prior to full testing and power-up. Any other regulations applicable to the equipment being installed such as the Machinery Directive and current health and safety legislation must also be adhered to.

All connections (including factory made) must be checked for the correct tightness prior to commissioning of the electrical installation.
All connections should also be inspected periodically to ensure correct tightness.

DO NOT USE POWER TOOLS ON THESE PRODUCTS

IP65 RCCB Protected Interlocked Socket
SISRAW63XX



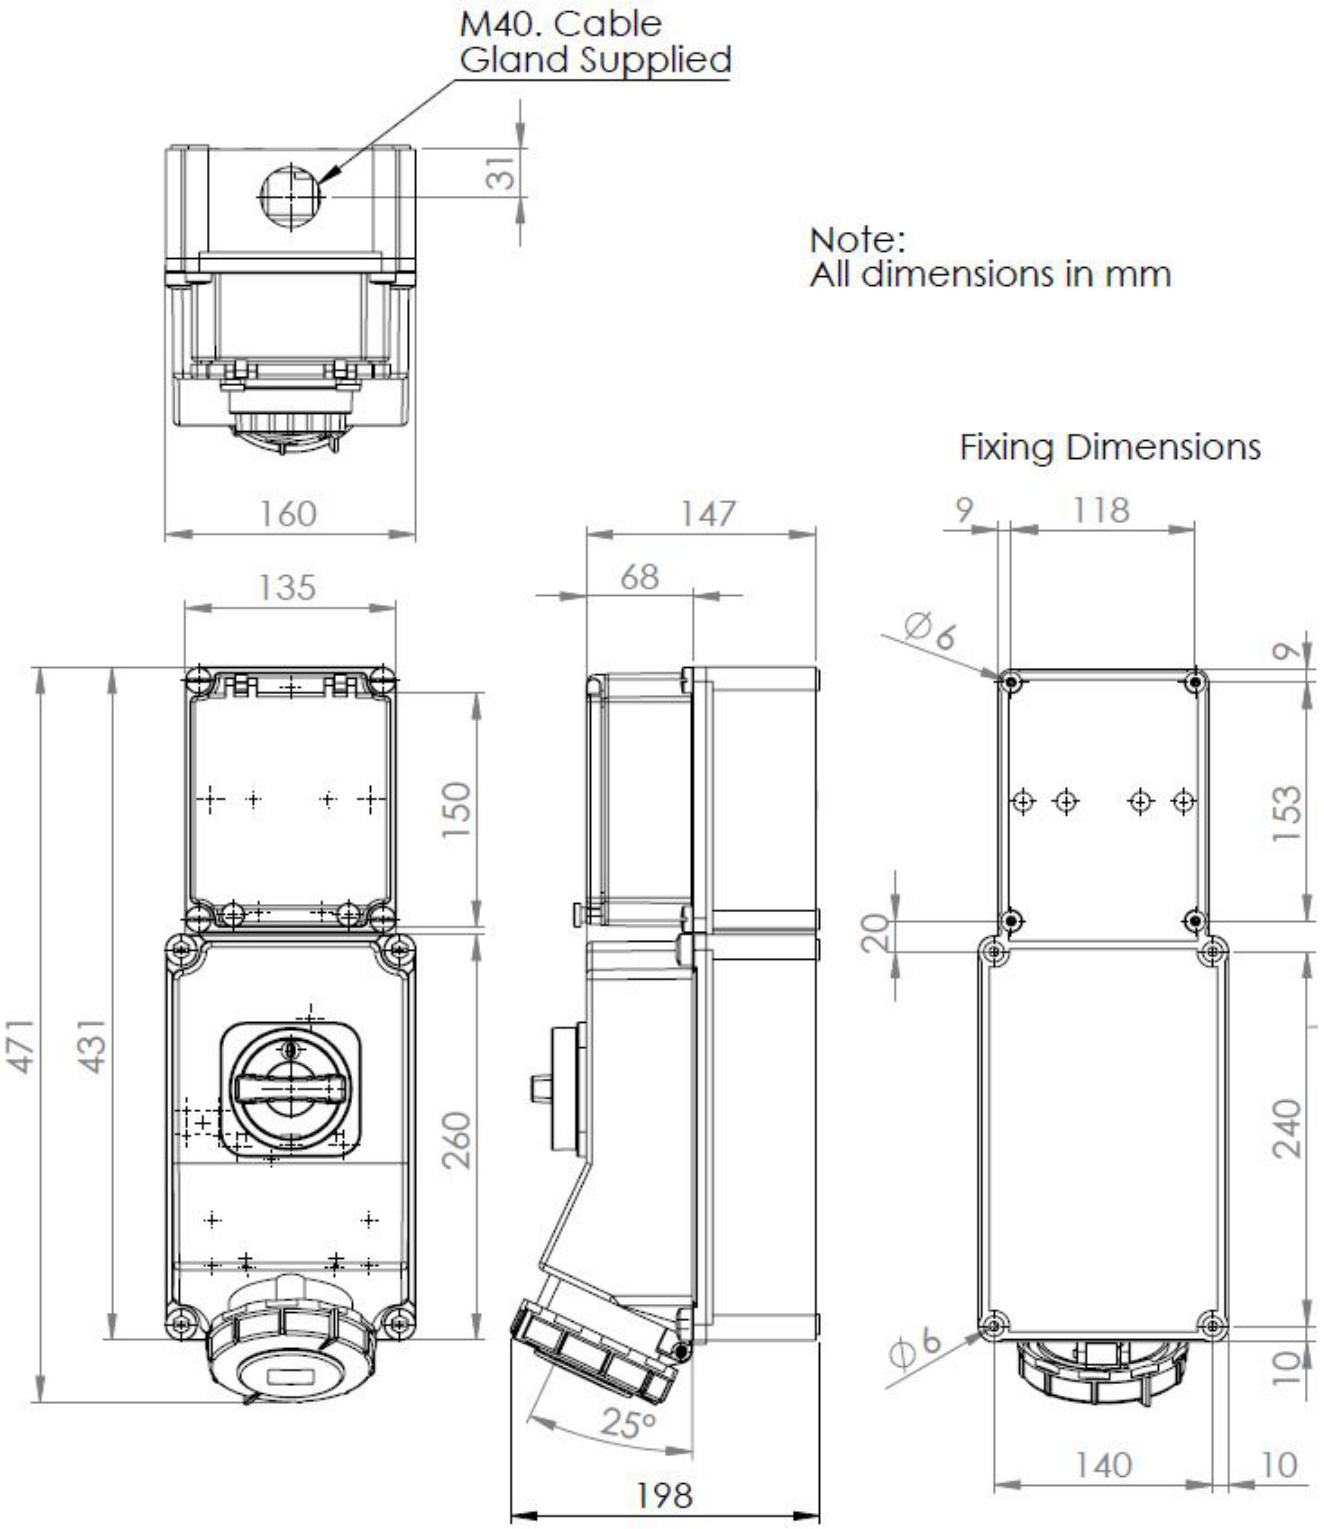
- Prewired with 80A Type A RCCB
- Spring-return lid with twist-lock ring ensures IP67 rating.
- Switched Interlocked for added protection.
- 1x M40 cable inlet (Top).
- Stay-on-lid screws included.
- IP65 Enclosure / IP67 Socket



Part Numbers	Amps (A)	Colour & Voltage	Poles	Protection Degree	Terminal Capacity	Recommended Terminal Torque
SISRAW633P	63A	Blue 230 V	2P+E	IP65 Enclosure IP67 Socket	25mm²	2Nm
SISRAW634V		Red 415 V	3P+E			
SISRAW635V		Red 415 V	3P+N+E			

Europa House, Airport Way, Luton, Bedfordshire, LU2 9NH
Technical: 01582 692 444 technical@europa-plc.com
www.europa-plc.com

Dimensions


M40. Cable
Gland Supplied
31
160
135
147
68
150
471
431
260
25°
198
Note:
All dimensions in mm
Fixing Dimensions
9
118
Ø6
9
153
20
240
Ø6
10
140
10