

# CAB P 604023

**FIBOX**  
Enclosing innovations



Sample image

**Order symbol :** CAB P 604023

**Product nr :** 8104306

**Description :** Polyester cabinet


**Remarks :** Grey door

**EAN :** 6418074050038

**El. number :**

- Finland : 3424139
- Denmark : 8212018031
- Sweden : 2539823

**Including :** Cabinet base, door with PUR gasket, 3mm double bit lock(s) with transport and plastic key, screws for mounting plate/DIN-rail and wall fastening lugs with screws. Wall mounting screws not supplied.

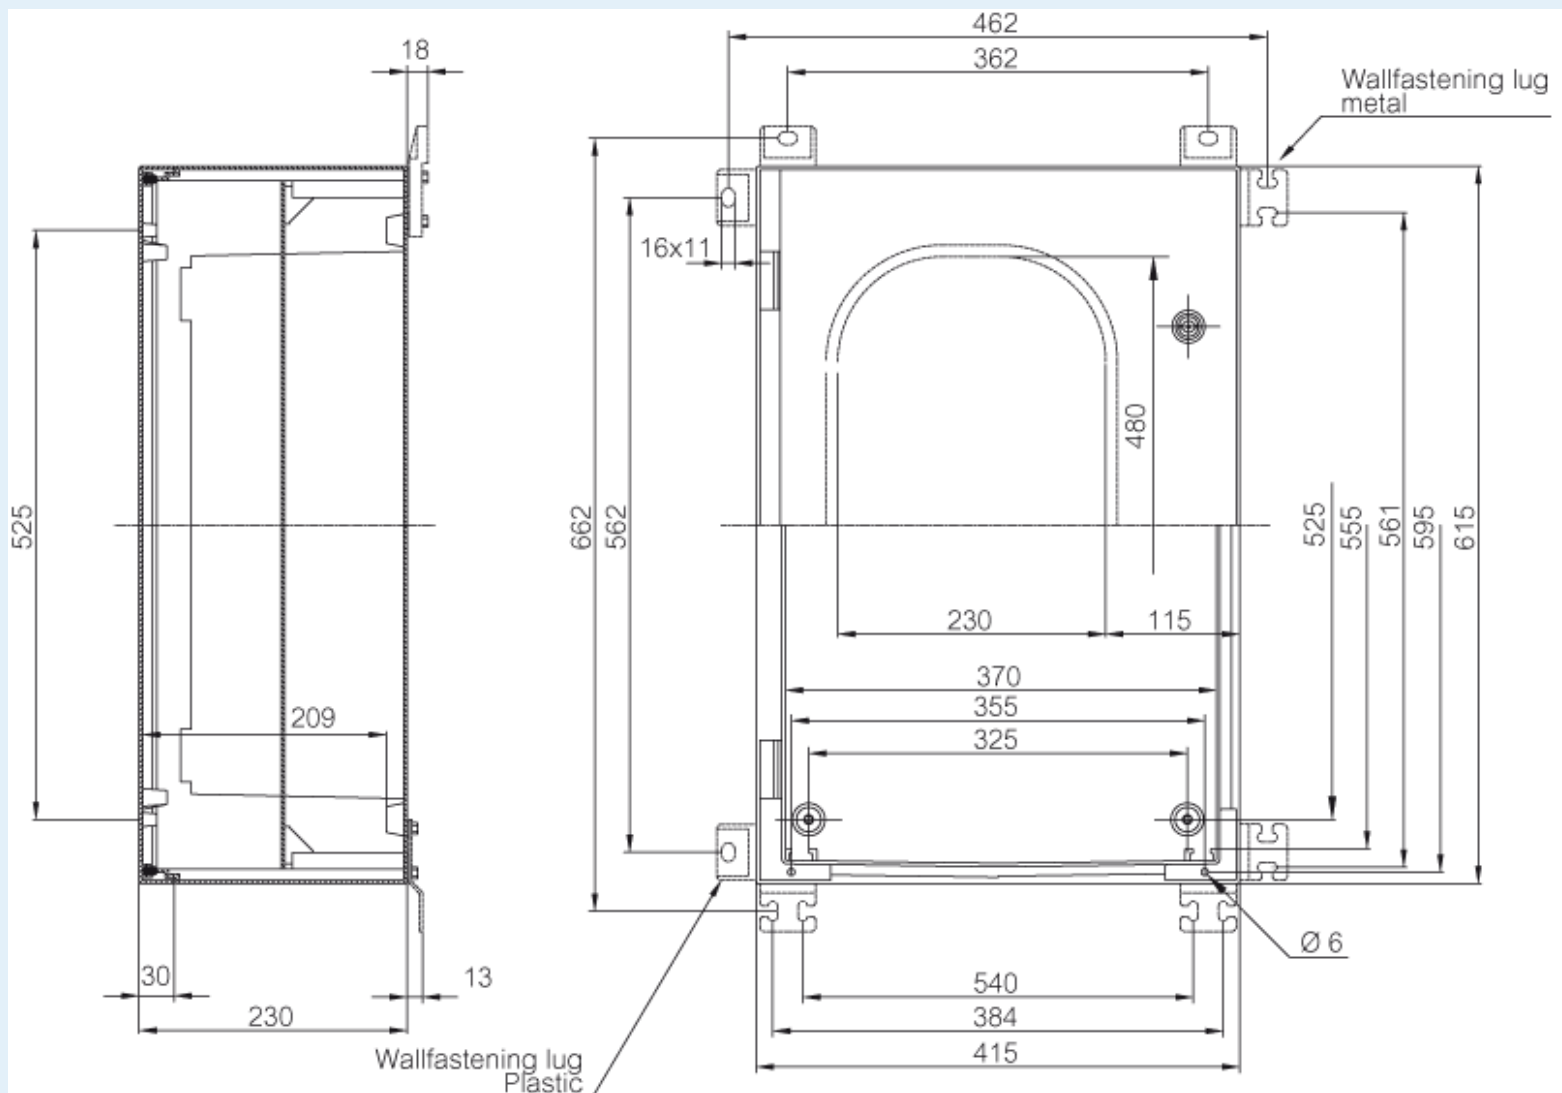

| Dimensions : | Height | Width | Depth |
|--------------|--------|-------|-------|
| mm :         | 600    | 400   | 230   |
| inch :       | 23.62  | 15.75 | 9.06  |

| Materials :       |                                  |
|-------------------|----------------------------------|
| Material :        | Glass Fiber Reinforced Polyester |
| Base colour :     | RAL_7035                         |
| Cover colour :    | RAL 7035 -light grey             |
| Gasket material : | Polyurethane                     |

| Temperatures :                |             |
|-------------------------------|-------------|
| Temperature °C (short term) : | -50 ... 120 |
| Temperature °C (continuous) : | -40 ... 80  |
| Temperature °F (short term) : | -60 ... 285 |
| Temperature °F (continuous) : | -40 ... 175 |

| Accessories : |                                                                   |
|---------------|-------------------------------------------------------------------|
| MP 6040       | Mounting plate, for enclosures:<br>(600 x 400 x 2)                |
| MB CAB        | Swing door kit<br>(187 x 145 x 29)                                |
| FP 6040-D     | Swing door/Front plate, for enclosures:<br>(580 x 362 x 80)       |
| FP 6040-3x18  | Front Plate with DIN openings, for enclosures:<br>(600 x 400 x 1) |
| MF 6040       | Mounting Frame with DIN-rails, for enclosures:<br>(600 x 400 x 1) |
| MPP 6040      | Mounting Plate, for enclosures:<br>(600 x 400 x 2)                |
| MPX 6040      | Mounting Plate, for enclosures:<br>(600 x 400 x 1)                |

| Ratings :                         |                   |
|-----------------------------------|-------------------|
| Ingress protection (EN 60529):    | IP65;             |
| Impact Resistance (EN 62262):     | IK10;             |
| electrical_insulation :           | Totally insulated |
| UV resistance :                   | UL 746C           |
| Flammability Rating :             | UL 94 HB          |
| Glow Wire Test (IEC 695-2-1) °C : | 960C              |