

Europa Components, Europa House, Airport Way, Luton, Beds, LU2 9NH
Technical: 01582 692 444 | technical@europacomponents.com
Sales: 01582 692 440 | sales@europacomponents.com
Website: www.europacomponents.com



It is the responsibility of the person installing the electrical equipment to ensure that the installation meets the requirements of the IET wiring regulations and is therefore 'fit for purpose'. Factors such as correct selection of components, cable sizing, protective devices and Earth bonding are all critical and should be checked prior to full testing and power-up. Any other regulations applicable to the equipment being installed such as the Machinery Directive and current health and safety legislation must also be adhered to.

All connections (including factory made) must be checked for the correct tightness prior to commissioning of the electrical installation.
All connections should be inspected periodically to ensure correct tightness.

DO NOT USE POWER TOOLS ON THESE PRODUCTS

Part Number: **EUC7RC**
1 Pole + Solid Neutral RCBO Type A 10kA 6-40A


Features & Benefits

- Can be fitted upstream of a Type A or Type AC device.
- Type A is also suitable for Type AC applications resulting to a wider range of installations which the RCBO can be used in.
- Suitable for electric vehicle charging where any smooth DC fault current is less than 6mA.



Product Range	EUC7RC
Standard(s)	BS EN 61009, EN 61009
Type	A
Declaration and Approval	CE & SEMKO
Characteristic Curve	B, C
Rated Current (In)	6, 10, 16, 20, 32 & 40A
Rated Residual Operating Current IΔn	30mA
Standard Tripping Time 1 x IΔn	≤ 300ms
Standard Tripping Time 5 x IΔn	≤ 40ms
Rated Voltage (Ue)	AC 230(240)V
Rated Frequency	50/60Hz
Rated impulse withstand Voltage (Uimp)	4kV
Number of Poles	1
Rated Short-Circuit Capacity (Inc)	10kA
Operating Temperature	-25° to 40°C*
Altitude	Not exceeding 2000 metres
Humidity	Not exceeding 50% at 40°C and 90% at 20°C
Pollution Degree	2
Terminal protection	IP20
Mounting	35mm DIN Rail
Terminal Type	Pillar
Terminal Capacity	1.0-16mm²
Recommended Terminal Torque (IN)	2Nm
Recommended Terminal Torque (OUT)	1.2Nm
* Average not exceeding 35°C over a 24 hour period. Note: Type A is suitable for Type AC applications. Type A is suitable where any smooth DC fault current is less than 6mA.	

Part Number Breakdown

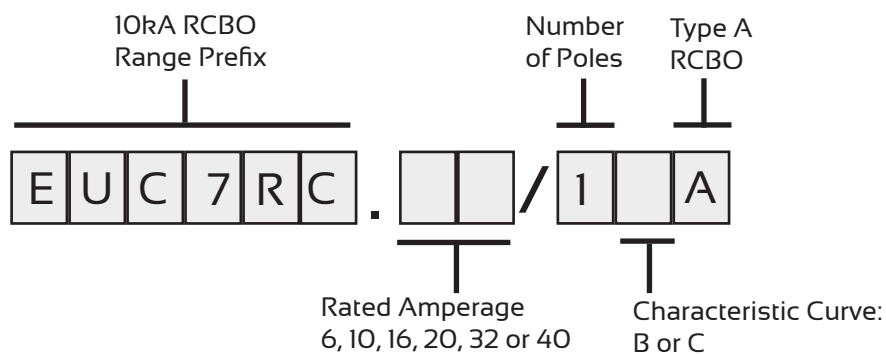

Examples:

40A 1 Pole 30mA B Curve Type A >> EUC7RC.40/1BA

32A 1 Pole 30mA C Curve Type A >> EUC7RC.32/1CA

20A 1 Pole 30mA B Curve Type A >> EUC7RC.20/1BA

Dimensions

