

# ARGENTA SERIES

## IP66 STEEL WALL-MOUNTING CABINETS

Description: IP66 ROLLED STEEL WALL-MOUNTING CABINET 300x300x150 OPAQUE DOOR

Reference:

**GN303015**

### Characteristics:

|                           |                                                                                |
|---------------------------|--------------------------------------------------------------------------------|
| Product type:             | Wall-mounting cabinet                                                          |
| Dimensions cabinet:       | (AxBxC) 300x300x150 mm                                                         |
| Installation:             | Surface                                                                        |
| Type of door:             | Single opaque door. Reversible                                                 |
| Locking:                  | 5-mm double-bit lock - One 1-point lock                                        |
| Finish:                   | Coated with primer, and hardened polyester paint, textured, with UV protection |
| Colour:                   | RAL 7035                                                                       |
| Mounting plate:           | With flat mounting plate. 2-mm galvanised sheet steel                          |
| Weight (kg):              | 5,8                                                                            |
| Materials:                | Cold-rolled steel EN 10130+A1                                                  |
| Thickness:                | Enclosure: 1,2 mm. Door: 1,2 mm. Cable entry lid: 2 mm.                        |
| Sealing gasket:           | Injected polyurethane sealing gasket                                           |
| Door material:            |                                                                                |
| Capacity:                 |                                                                                |
| Max. cabinet load:        | 150 kg                                                                         |
| Max. mounting plate load: | 125 kg                                                                         |
| Max. door load:           | 25 kg                                                                          |

### Technical data:

|                            |                       |
|----------------------------|-----------------------|
| Degree of protection:      | IP66                  |
| NEMA degree of protection: | NEMA 1, 12, 4         |
| Resistance to impact:      | IK08                  |
| Ambient temperature range: | -25 °C / +60 °C       |
| Maximum operating voltage: | 1000 V AC / 1500 V DC |

### Certificates and standards:

|               |                        |
|---------------|------------------------|
| Directive:    | 2014/35/EU             |
| Standards:    | IEC 62208, IEC 61439-1 |
| Certificates: | UL508A                 |



### Codes:


|                        |               |
|------------------------|---------------|
| EAN:                   | 8431044490229 |
| Customs tariff number: | 85.38.10.00   |
| ETIM 8.0:              | EC000261      |

# ARGENTA SERIES

## IP66 STEEL WALL-MOUNTING CABINETS

Description: IP66 ROLLED STEEL WALL-MOUNTING CABINET 300x300x150 OPAQUE DOOR

Reference: GN303015

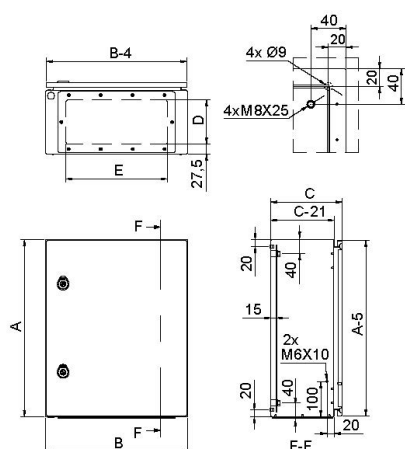

Standard drawing

Detailed drawing:  <https://www.ide.es/downloads/planos/pdf/GN303015.pdf>

 <https://www.ide.es/downloads/planos/stp/GN303015.stp>

|                      |                                     |                                    |   |
|----------------------|-------------------------------------|------------------------------------|---|
| Cable entry:         | (DxE) 65x185 mm                     | Body to be flush-fitted:           | - |
| Wall fixing:         | (HeightxWidth) 260x260 mm           | Wall fixing material:              | - |
| Inside usable space: | (HeightxWidthxDepth) 250x250x129 mm | Glass door with transparent panel: | - |
| No. Hinges:          | 2                                   | Door profiles:                     | 2 |

### Sustainability:

RoHS - REACH

### Supply:

Supplied in individual packaging containing cabinet, plate and accessory bag. Mounting plate is supplied unassembled inside the packaging.

### Product end of life:

It does not require specific recycling operations.

### Recommended applications:

Industrial environments, manufacturing companies requiring a high degree of protection against dust, splashes and impacts.