


FIBOX
Enclosing innovations



Technical drawing of a square plate with dimensions and a central hole. The drawing shows the plate with a central circular hole. The overall dimensions are 278 mm by 278 mm. The inner dimensions of the plate are 254 mm by 254 mm. The distance from the center of the hole to the inner edge is 225 mm. The distance from the center of the hole to the outer edge is 257 mm. The thickness of the plate is 25 mm. The drawing includes a detailed view of the corner and a section view showing the internal structure.

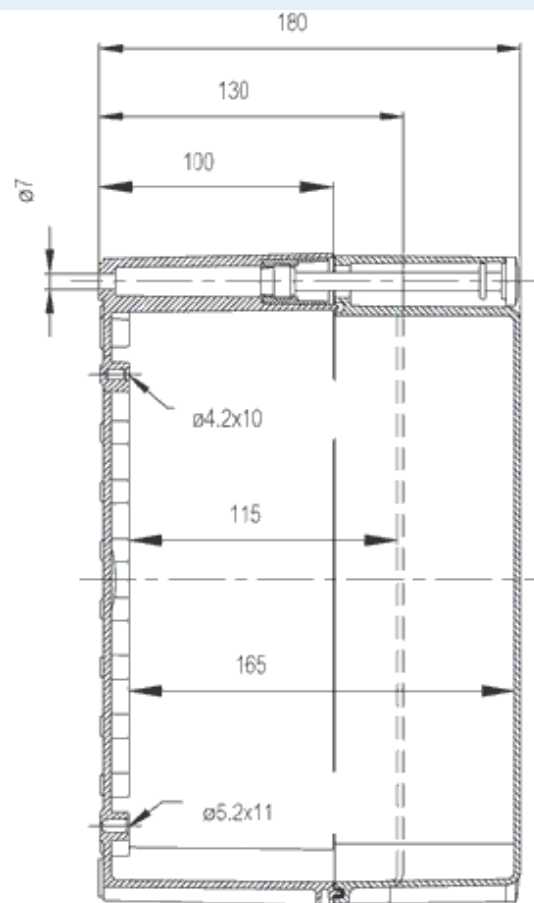

Extension frame, for enclosures:
(280 x 280 x 50)

inch :	11.02	11.02	7.09
Materials :			
Material :	Polycarbonate		
Base colour :	RAL_7035		
Cover colour :	RAL 7035 -light grey		
Gasket material :	Polyurethane		
Temperatures :			
Temperature °C (short term) :	-40 ... 120		
Temperature °C (continuous) :	-40 ... 80		
Temperature °F (short term) :	-40 ... 250		
Temperature °F (continuous) :	-40 ... 175		

EKV 22	DIN-35 Mounting rail, for enclosures: (235 x 35 x 7)
EKOVT	Mounting plate, for enclosures: (238 x 238 x 1.5)
MPI EKO 2828	Multiperforated plastic mounting plate (244 x 244 x 4)
Ratings :	
Ingress protection (EN 60529):	IP66; IP67;
Impact Resistance (EN 62262):	IK08;
electrical_insulation :	Totally insulated
Halogen free (DIN/VDE 0472, Part 815) :	Yes
UV resistance :	UL 746C
Flammability Rating :	UL 94 V0
Glow Wire Test (IEC 695-2-1) °C :	960C
Certificates :	
DSS_FI_41597_A1	